





Features			
Access Control:	Mechanical pushbutton lock-eli	Mechanical pushbutton lock-eliminates problems and costs associated with	
	issuing, controlling, and collecti	ing keys and cards. Provid	es exterior access by
	combination, while allowing free egress.		
No Battery:	Fully mechanical lock eliminate	s the material and labor e	xpense of
	battery replacements		
Locking Device Options:	Cylindrical: Cylindrical latch wit	h 3 hour UL/ULC fire ratir	ng on "A" labeled doors
	Rim Exit Device: Compatible with	th most leading brands of	exit devices (exit device
	and mounting hardware not inc	luded)	
	Universal mounting plate (include	ed) simplifies installation and	l eliminates any
	requirement to stock different loc	ks/plates for various exit de	vices
Exit Device Compatibility:	Arrow S1250	Monarch 18R/F-18R	Sargent 8888
	Arrow S3800	Precision 21/FL 21	Von Duprin 22/22F
	Corbin Russwin 5200/5200A	Sargent 2828	Von Duprin 98/98F
	Detex 10/F10	Sargent 3828	Von Duprin 99/99F
	Dorma 9300/9300F	Sargent 8800	Yale 7100
	· Cannot be used with mortise	e design or most vertical	rod Exit Devices
	ATTENTION: Compatibility is	s subject to change if m	odifications are made
	by Exit Device manufacture	rs without Kaba Access	Control's knowledge
Number of Codes:	Single access code-one easy to	manage code for all user	S
Programming:	Lock is easily programmed via keypad without removing lock from the door		
Handing:	Non-handed, pre-assembled for	left-hand door installatio	ns–easily changed
	in the field		
Key Override:	Key-in-lever cylinders, small for	mat interchangeable core	s, and large format
	removable cores		
Operation Modes:	Single credential-access		
	Passage (select models)-Allows	access without using the	lock entry code. Feature
	activated from the inside with a thumbturn or key (included with all passage		
	feature models)		
	Exit trim may be "dogged" if exit device allows		
Direct Drive Design:	Clutch free design-minimizes f	Clutch free design-minimizes friction and wear	
Economical:	A cost effective access control solution		

Simplex®



5000 Series

Mechanical Features		
Construction:	Extra heavy-duty, solid cast housings, solid cast levers, and wear tested for	
	extensive use in indoor and outdoor applications	
Numeric Keypad:	Vandal resistant, solid metal pushbuttons	
Handing:	Non-handed, pre-assembled for left-hand door installations-	
	easily changed in the field	
Standard Finishes:	Satin Chrome 26D (626) housings and levers	
	Black 676 housings with Sa	tin Chrome 26D (626) levers and accents
Optional Finishes:	Bright Brass 03 (605) hous	ings and levers
	Bright Chrome 026 (625) he	ousings and levers
	Dark Bronze 744 housings a	and levers with Brass accents
	Satin Brass 04 (606) housir	ngs and levers
Backset:	Cylindrical: 2 ³ / ₄ " (70 mm) ba	ackset, 2 3/8" (60 mm) backset
	Exit Device: varies by exit d	evice
Latch:	½" (13 mm) latch, ¾" (19 mr	n) latch (optional)
Minimum Stile Recommended:	5" (127 mm)	
Weight:	Cylindrical: 9 lbs. (4.08 kg)	
	Exit Device: 8 lbs (3.63 kg)	
Key Override		
Universal Key-In-Lever	· ·	linder (prepped to Kaba 90 or Schlage "C" Keyway,
Cylinders:	keyed different) and tailpied	ces for compatibility with:
	Abloy 5277	Kaba Peaks 1099
	Abloy 5477	Marks
	Arrow C 100	Medeco 20W200H1
	ASSA 65611	Sargent 10 Line
	ASSA 65691	Schlage 23-001
	Corbin Russwin 2000-03	Schlage Primus 20-760
	Kaba 1539	Australian: Kaba expert 107K5 and Boyd KC286
	Kaba 1599	European: Quattro S/Expert an AP2 (5 and 6-pin)
	Kaba Gemini 4730	
Interchangeable Cores:	Small format-Best and equi	
Removable Cores:		A/Yale (5 or 6-pin), Corbin Russwin, Schlage,
	and Sargent	
Installation		
Installation Door Preparation:	Easily installs on wood or m	estal doors ASA 161 door proparation with additional
Door Preparation.		etal doors. ASA 161 door preparation with additional
Door Thickness:	through holes	
Coor Thickness: Cylindrical: $1\frac{3}{8}$ " (35 mm) to $2\frac{1}{4}$ " (57 mm). Pre-assembled to accomm $1\frac{5}{8}$ " (41 mm) to 2 " (51 mm)		12.74 (37 min). Fre assembled to accommodate doors
		2 ½" (57 mm). Pre-assembled to accommodate doors
Itoms Supplied Include:	1 ³ / ₄ " (44 mm) to 2 ¹ / ₈ " (54 mm)	
Items Supplied Include:	Lock assembly, installation manual, full scale template and required installation hardware	
Additional Items Supplied		v 1500 6-nin cylinder with tailnings, and two
With Key-in-Lever Cylinder	Universal Kaba high security 1599 6-pin cylinder with tailpiece, and two	
model only:	nickel silver keys	
model only.		






Certification and Testing

Accessibility Standard:	Americans with Disabilities Act (ADA)	
Durability : ANSI/BHMA Grade 1 Certified, A156.2; weather resistant, wear tested for		
	extensive use in indoor and outdoor applications	
Fire Rating:	3-hour UL/ULC fire rating for "A" label doors	
Fire Rating:	3-hour UL/ULC fire rating for "A" label doors	


Warranty

Warranty: 3-year warranty

Cylindrical

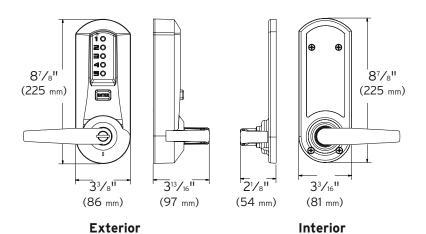

Model 5021



- · Combination Entry
- Key Override
- Exterior Combination Change
- Knob Available


• Interior Combination Change, DOD

Compliant
• Knob Available

· Key Override

dol FO41

Model 5041




- Combination Entry
- Key Override
- Exterior Combination Change
- Passage
- Knob Ávailable

Model 5051


· Combination Entry

Model 5031




- · Combination Entry
- Key Override
- Interior Combination Change, DOD Compliant, Passage
- Knob Available

Exit Trim

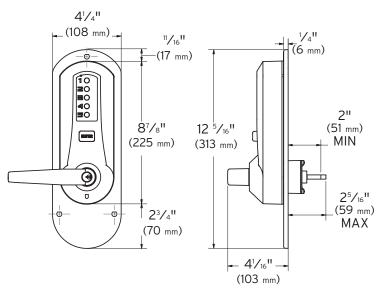

Model 5010




- · Combination Entry
- Key Override
- Exterior Combination Change (only)
- Egress with Exit Device (Not Supplied)

Exterior

Simplex®



5000 Series

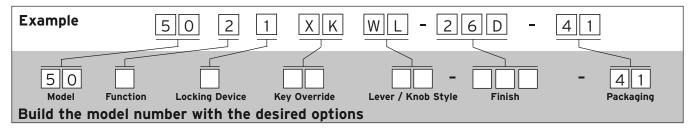

Base Model	Description
5021XKWL26D41	Cylindrical Lock with Lever, Key-in-
	Lever Cylinder

Choose one option from each category

Description
Exit Trim (E.T.)
Cylindrical Lock
Cylindrical Lock
 Interior Combination Change
• D.O.D. Compliant
Cylindrical Lock
• Passage
Cylindrical Lock
• Passage
 Interior Combination Change
• D.O.D. Compliant

Locking Device Options	Description
0+	Exit Trim (available with E.T. only)
1	Cylindrical ½" (13 mm) throw latch, floating face plate, 2¾" (70 mm) backset (UL listed)
2	Cylindrical ½" (13 mm) throw latch, floating face plate, 23/6" (60 mm) backset (UL listed)
5	Cylindrical ³ / ₄ " (19 mm) throw latch, beveled face plate, 2 ³ / ₄ " (70 mm) backset (UL listed)

Key Override Options++	Descr	Description	
XK	K-I-L	Kaba Cylinder	
		(Kaba 90 keyway) Included	
XS	K-I-L	Kaba Cylinder	
		(Schlage "C" Keyway) Included	
В	I/C	Best and Equivalents	
		(6 or 7-pin Length)	
С	R/C	Corbin Russwin	
М	R/C	Medeco/ASSA/Yale (5 or 6-pin)	
R	R/C	Sargent	
S	R/C	Schlage	

Lever/Knob Options	Description
WL	Winston Lever
WK	Winston Knob (Cylindrical Locks Only)

Finish Options	Description
026	Bright Chrome (625)
03	Bright Brass (605)
04	Satin Brass (606)
26D	Satin Chrome (626)
676	Black with Satin Chrome Accents
744	Dark Bronze with Brass Accents
	(simulated 10B/613)

Notes

+	Exit Device Compatibility	Arrow S1250 Arrow S3800 Corbin Russwin 5200/5200A Detex 10/F10	Monarch 18R/F-18R Precision 21/FL 21 Sargent 2828 Sargent 3828	Sargent 8888 Von Duprin 22/22F Von Duprin 98/98F Von Duprin 99/99F
		Dorma 9300/9300F	Sargent 8800	Yale 7100

• Cannot be used with Mortise design or most vertical rod Exit Devices

ATTENTION: Compatibility is subject to change if modifications are made by Exit Device manufacturers without Kaba Access Control's knowledge

Interchangeable/Removable core cylinders are not included with the lock





Simplex® 2015 Series

Model	Description
54266	Blank Keys
54266-1-11	Master Keys for key override models.
	(Old #54266-1) (Specify Keycut)
54266-2-11	Service Keys for override models.
	(Old #54266-2) (Specify Keycut)

Simplex® 6200 Series

Model	Description
55072-03-01	Filler Plate-Bright Brass
55072-26D-01	Filler Plate-Satin Chrome
55072-19-01	Filler Plate-Black

Simplex® 900 Series

Simplex 900 Series		
Description		
Adapter kit for doors with metal frames.		
Includes riser plates and surface mounted		
strike. Finish 04 Satin Brass; packaged 1		
per box. (Old #74464/74468)		
Adapter kit for doors with metal frames.		
Includes riser plates and surface mounted		
strike. Finish 26D Satin Chrome; pack-		
aged 1 per box. (Old #74464/74468)		
Face plate shield. Not for use with key		
override models. Inhibits unauthorized		
observation of the combination. Finish		
26D Satin Chrome; packaged 1 per box.		
(Old #24081-000-01)		
Blank Keys		
Master Keys for key override models.		
(Old #54266-1) (Specify Keycut)		
Service Keys for key override models		
(Old # 54266-2) (Specify Keycut)		

Simplex® 1000, L1000 & 5000 Cores & Wrap Plates

Model	Description
204231-03-41	Wrap Plate, 10½" (267 mm),
	Bright Brass (605)
204231-05-41	Wrap Plate, 10 ½" (267 mm),
	Antique Brass (609)
204231-26D-41	Wrap Plate, 10 ½" (267 mm),
	Satin Chrome (626)
204232-03-41	Wrap Plate, 15" (381 mm),
	Bright Brass (605)

204232-05-41	Wrap Plate, 15" (381 mm),
	Antique Brass (609)
204232-26D-41	Wrap Plate, 15" (381 mm),
	Satin Chrome (626)
20484-03-01	Best Equivalent SFIC
	Bright Brass (605)
201484-05-01	Best Equivalent SFIC
	Satin Brass (609)
201484-26D-01	Best Equivalent SFIC
	Satin Chrome (626)
201600-083-01	Anti-Spy Shield (1000/L1000 Models Only)
204022-000-01	Latch Extension Assembly converts to
	3¾" (10 cm) Backset
204023-000-01	Latch Extension Assembly converts to
	5" (13 cm) Backset
54644-000-41	Weather Cover (smoke colored)
64754-000-01	Lubriplate Aero Grease Tubes (1.75 oz
	tubes) 150°F to -70°F (66°C to -57°C)
64684-26D-01	Installation Jig (1000/L1000/5000/E5000)

Simplex® Mounts*

Simplex Mounts.	
Model	Description
204246-000-41	LD Series-450 & 470 Dual Mount
04083-000-41	8100 Series
204086-000-41	EE1000 Series
204087-000-41	LP1000 Series
203053-000-41	900 Series-904 & 919 Dual Mount
204189-000-41	7100 Series-7108 & 7104 Dual Mount
204092-000-41	7100 Series-(7106 Series Only)
204094-000-41	6200 Series
204096-000-41	2015 Series
203044-000-41	1000, L1000, 5000 Series
74378-CH	3000 Series Narrow Stile
SP5000 ACLMT	Simplex 5000 Acrylic Mount

* Mounts do not include locks

Hardwood product demonstration mount, packaged

1 per box.