



Fire-rated Fusible Link Louver for 1-3/4" Thick Doors up to 90 Minutes L-1900




*up to 90 minutes.

Materials & Finishes

- Blades close when activated by fire/heat
- 18 ga. cold rolled steel frame
- 18 ga. cold rolled steel adjustable "Z" blades
- Mitered corners secured with reinforcing clips
- Stainless Steel Spring
- 165° Fusible link
- Free area 40%
- #8 x 3/4" Phillips head SMS
- Gray Primer (GPZ) powder coat finish

Available Options

- Powder coat color options - see color chart on www.ngp.com
- Aluminum insect screen - 22 ga. 1/8" square mesh installed on exterior side unless requested otherwise
- Torx Security screws
- Galvanneal A40 steel

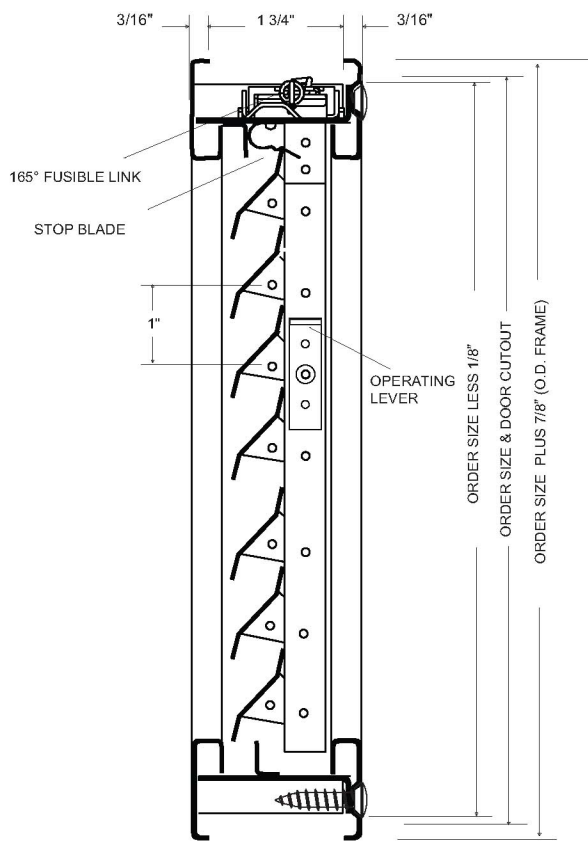

Project:

Submitted by:

Date:

Notes: