PARTS

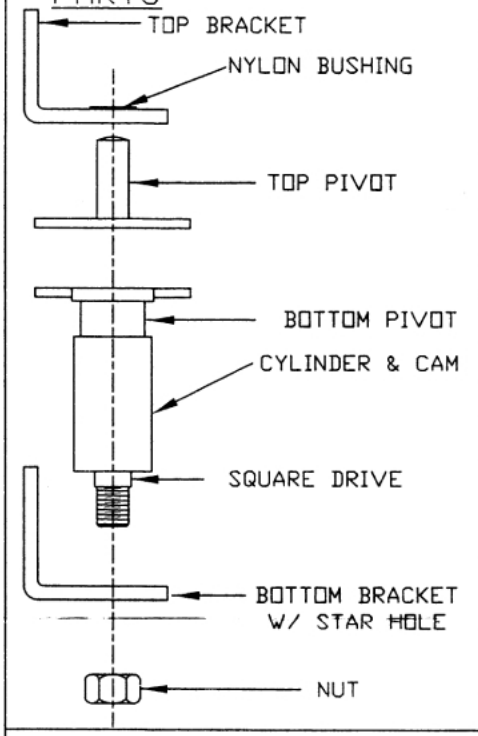

STEP NO. 1

FASTEN BOTTOM BRACKET TO JAMB

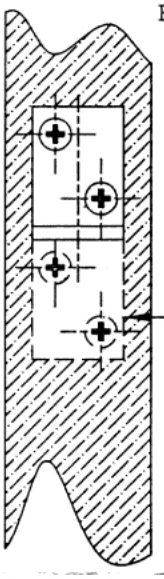

BE SURE BOTTOM BRACKET IS IN VERTICAL ALIGNMENT WITH TOP BRACKET

STEP NO. 2

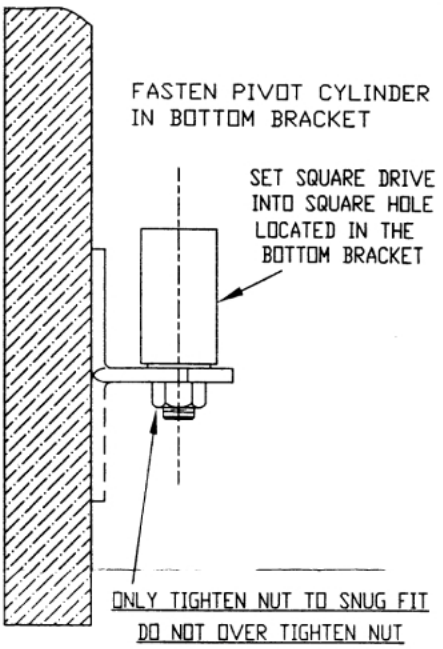

ONLY TIGHTEN NUT TO SNUG FIT
DO NOT OVER TIGHTEN NUT

STEP NO. 3

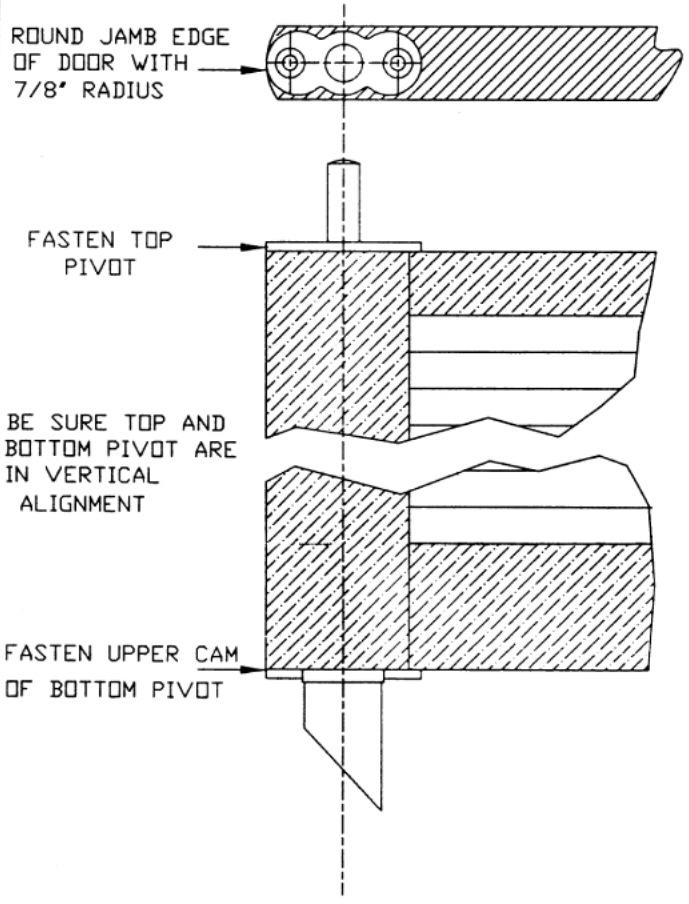

STEP NO. 4

FASTEN TOP BRACKET ALLOWING CLEARANCE BETWEEN TOP BRACKET AND TOP PIVOT PLATE. BE SURE THAT THEY ARE IN VERTICAL ALIGNMENT WITH BOTTOM BRACKET.

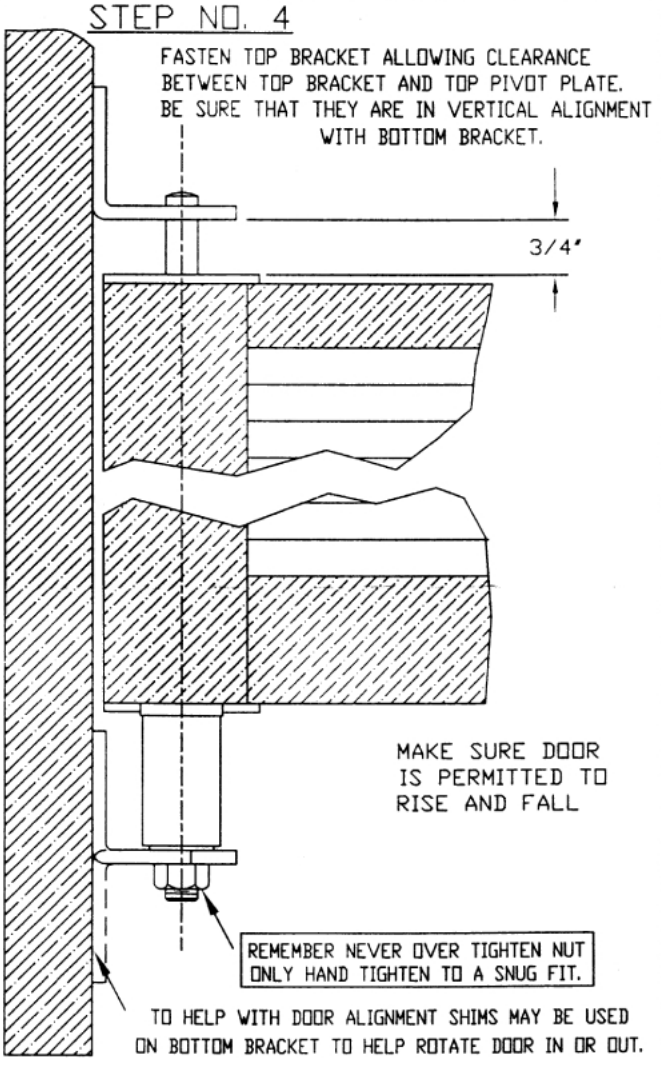

----NOTE----

THE 7512-H WITH HOLD OPEN FEATURE DOES NOT REQUIRE ANY SPECIAL INSTALLATION. THE HOLD OPEN FEATURE IS ON THE CAM AND HOLDS DOOR WHEN OPENED TO AT LEAST 90°. TO RELEASE DOOR, PUSH DOOR WITH AN EASY PUSH. 7512 AND 7512-H ARE DOUBLE ACTING AND ARE CAPABLE OF 180° PLUS OPENING.



DOOR THICKNESS
7/8" TO 1 5/8"

PBB ARCHITECTURAL ONTARIO, CA

TYPE : LOUVER DOOR GRAVITY PIVOT
PART NO.: 7512 AND 7512-H DOUBLE ACTING

Drawn by :	DATE	SCALE	DRAWING NUMBER	REV.
	14 MAR 2022	N.T.S.	865661	B